


## TYPES OF PACKAGING AVAILABLE



FOR MORE PRODUCTS AND INFORMATION, PLEASE VISIT [COBRAANCHORS.COM](http://COBRAANCHORS.COM)

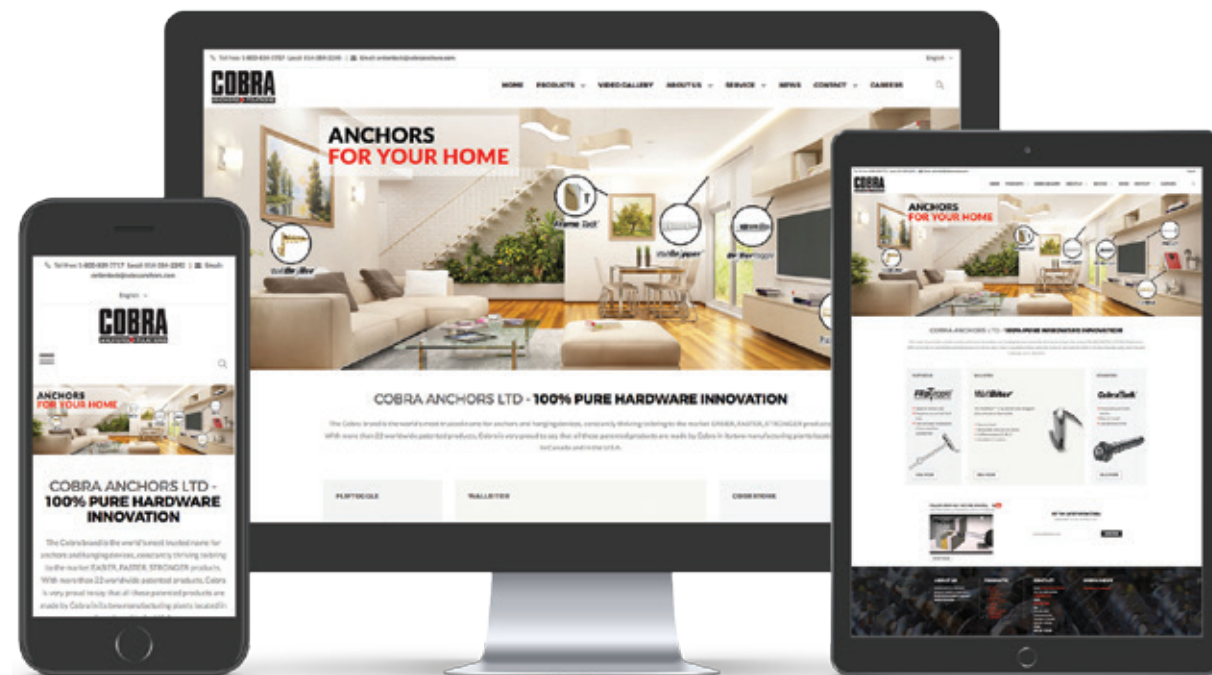

**COBRA**  
ANCHORS ► FIXATIONS  
[cobraanchors.com](http://cobraanchors.com)

### Head Office, Manufacturing Plant and Distribution Center

8051 Metropolitain Blvd. E. Montreal, Quebec, H1J 1J8, Canada  
T. (514) 354 2240 • 800 824 7717 • F. (514) 355 7421 • 800 432 4143

### Manufacturing Plant and Distribution Center

504 Mt. Laurel Ave. Temple, Pennsylvania, 19560, U.S.A.  
T. (610) 929 5764 • 800 824 7717 • F. (610) 929 2517 • 800 432 4143

## HOLLOW WALL ANCHORS PROGRAM

OVER 22 WORLDWIDE OWNED PATENTED PRODUCTS




**COBRA**  
ANCHORS ► FIXATIONS  
[cobraanchors.com](http://cobraanchors.com)




Installation Video

# WallDriller®


ZINC / NYLON



2 SIZES AVAILABLE

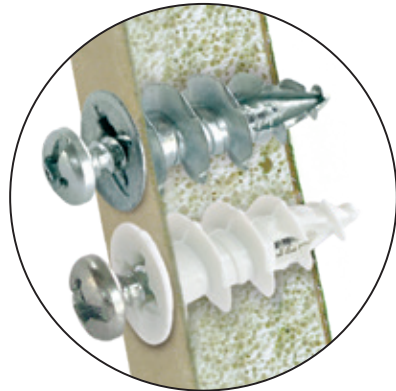

**PRO'S CHOICE**

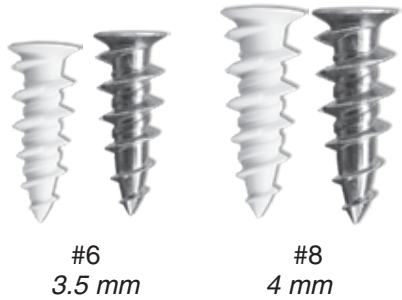


- **SELF-DRILLING ANCHORS**  
no pre-drilling required
- **EASY TO REMOVE**  
and reinstall
- Made of **STRONG NYLON**  
reinforced with fiberglass
- **CAN BE USED IN WALLS**  
made of two drywall panels  
(#8 / 4 mm)
- Available in **NYLON OR ZINC**
- Not recommended for ceiling applications



SAFE LOAD UP TO *	
↓ <b>63</b> lb	
↓ <b>28</b> kg	
1/2" DRYWALL	



# FlipToggle®

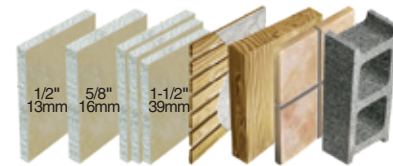

2 SIZES AVAILABLE

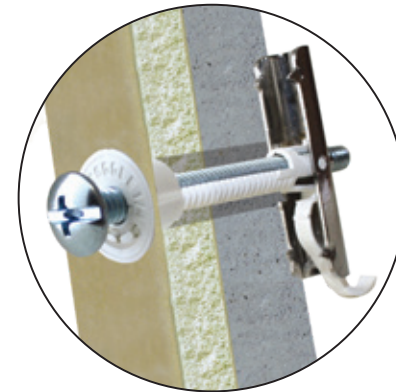


**FOR THICK MATERIAL**


- Ideal for **ALL TYPE OF HOLLOW WALL**, up to 3" (75mm) thick
- **SUPERIOR** holding power
- **NEW ONE STRAP DESIGN**  
for easier insertion and flipping operation
- Can be **USED WITH ANY BOLT** length
- **REQUIRES** an one half inch hole
- Could be **USED FOR CEILING APPLICATIONS**
- Not recommended for insulated walls

SAFE LOAD UP TO *	
↓ <b>137</b> lb	
↓ <b>64</b> kg	
1/2" DRYWALL	

# WallGripper®



1 SIZE AVAILABLE

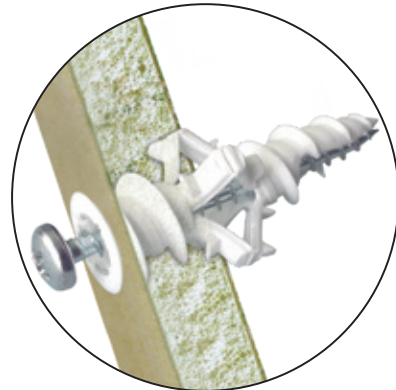


**EXPANDS AND GRIPS**

- **EXPANDS AND GRIPS**  
tightly behind drywall
- **SELF-DRILLING ANCHORS**  
no pre-drilling required
- **ALL YOU NEED**  
is a screwdriver
- Expansion anchor could be **USED FOR CEILING APPLICATIONS**



SAFE LOAD UP TO *	
↓ <b>85</b> lb	
↓ <b>38</b> kg	
1/2" DRYWALL	



# Nylon Toggles



3 SIZES AVAILABLE

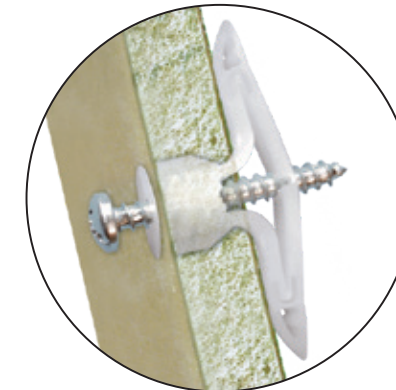


**QUICK & EASY**



- Can be used in **ALL KINDS OF MATERIAL**  
(except wood)
- Corrosion **RESISTANT**
- Made of **REINFORCED NYLON**

SAFE LOAD UP TO *	
↓ <b>100</b> lb	
↓ <b>45</b> kg	
1/2" DRYWALL	

# DrillerToggle®



3 SIZES AVAILABLE

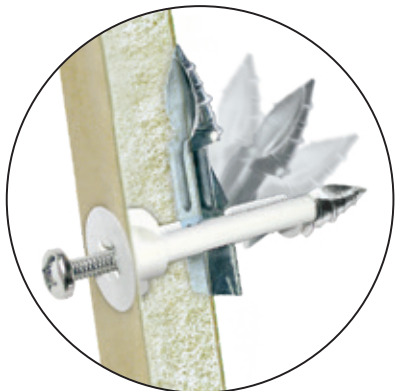


**STRONG HOLDING POWER**

- **FAST AND EASY** to install
- **SELF-DRILLING ANCHORS**,  
no pre-drilling required
- **ALL YOU NEED**  
is a screwdriver
- Could be used **FOR CEILING APPLICATIONS**
- Not recommended for insulated walls


SAFE LOAD UP TO *	
↓ <b>110</b> lb	
↓ <b>50</b> kg	
1/2" DRYWALL	



# TripleGrip®

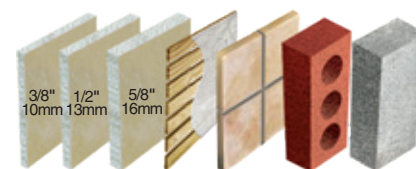

4 SIZES AVAILABLE

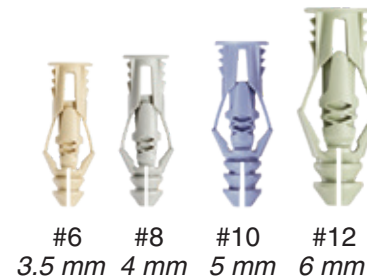

**SUPERIOR HOLDING POWER**

- **EASY** to install
- Can be used in **ALL KINDS**  
of material (except wood)
- **TWO EXPANDABLE WINGS**  
that grip tightly behind the drywall
- **TWO LATERAL WINGS** hold the  
anchor in place, preventing any rotation
- Available in **IMPERIAL**  
and **METRIC** sizes
- Could be used **FOR CEILING APPLICATIONS**

SAFE LOAD UP TO *	
↓ <b>61</b> lb	
↓ <b>27</b> kg	
1/2" DRYWALL	

\* Refer to web site technical sheets for exact weight load in material